


Single Core LSZH Insulated Flame Retardant Cables 450/750 V

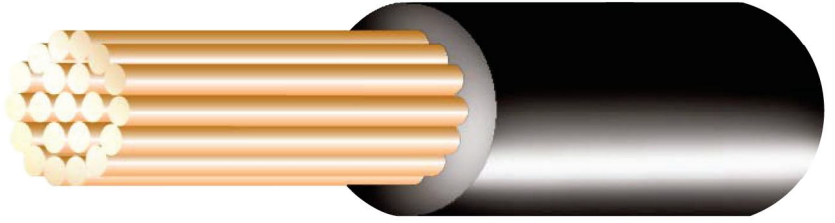

Harmonized Code
H07Z-U/R

Type
6491B

Standards

- BS 7211 • HD 22.9 • IEC 60332 • IEC 61034
- IEC 60754

Product Certification



Range of Size

1.5 mm² ~ 400 mm²

Applications

Installations inside conduits or trunkings. Emits less smoke and no halogen gas when affected by fire.

Constructions

Conductor

Class 1/2 plain annealed copper wires, solid or stranded.

Insulation / Cross-linked LSZH Polymer.

Core Colour

Brown, grey, black, blue, green/yellow or others on request.

Technical Data

Operating Temperature

90 °C

The Current Ratings and Voltage Drop figures refer to Technical References Section Table 2B respectively.